





DOUBLE ROW ANGULAR CONTACT BALL BEARINGS


Non Filling-Slot Type Series 5200, W5200

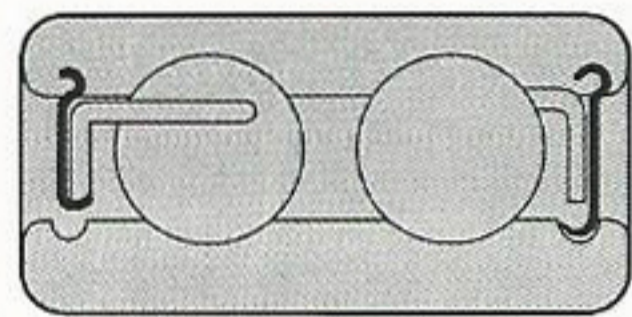


ZZ

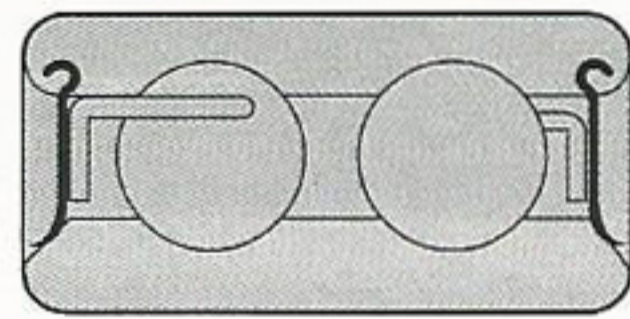

2RS

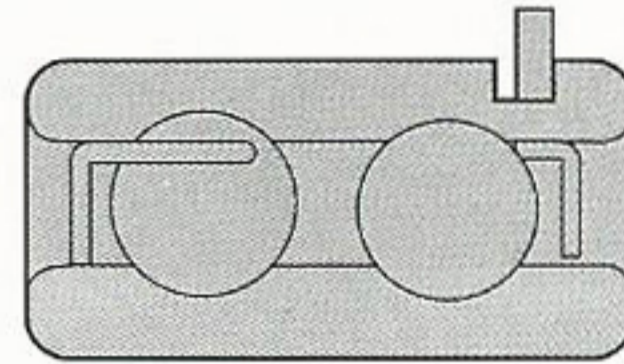

NR

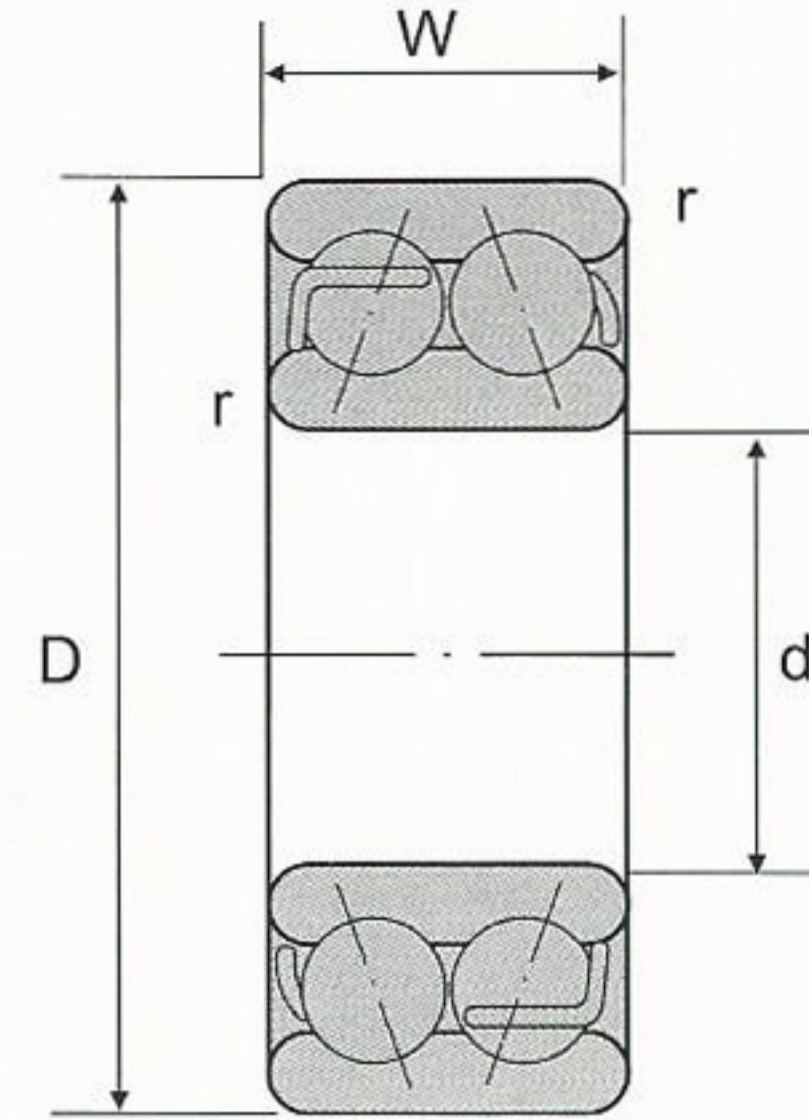

OPEN

SAS Bearing No.	Bore d		Outer Diameter D		Width W			Radius r		Basic Load Rating lbs		Weight lbs
	mm	inch	mm	inch	mm	fraction	inch	mm	inch	Dynamic Cr	Static Cor	
5200	10	.3937	30	1.1811	14.287	9/16	.5625	0.8	.032	1560	855	0.13
5201	12	.4724	32	1.2598	15.875	5/8	.6250	0.8	.032	2050	1140	0.16
W5201	12	.4724	32	1.2598	17.463	11/16	.6875	0.8	.032	2360	1300	0.17
5202	15	.5906	35	1.3780	15.875	5/8	.6250	1.0	.039	2260	1360	0.18
W5202	15	.5906	35	1.3780	19.050	3/4	.7500	1.0	.039	2620	1580	0.19
5203	17	.6693	40	1.5748	17.463	11/16	.6875	1.0	.039	2870	1770	0.20
W5203	17	.6693	40	1.5748	20.638	13/16	.8125	1.0	.039	2870	1770	0.20
5204	20	.7874	47	1.8504	20.638	13/16	.8125	1.5	.059	4300	2710	0.34
W5204	20	.7874	47	1.8504	23.813	15/16	.9375	1.5	.059	4300	1770	0.36
5205	25	.9843	52	2.0472	20.638	13/16	.8125	1.5	.059	4650	3200	0.42
W5205	25	.9843	52	2.0472	23.813	15/16	.9375	1.5	.059	4650	3200	0.45
5206	30	1.1811	62	2.4409	23.813	15/16	.9375	1.5	.059	6450	4600	0.64
W5206	30	1.1811	62	2.4409	26.988	1-1/16	1.0625	1.5	.059	6450	4600	0.74
5207	35	1.3780	72	2.8346	26.988	1-1/16	1.0625	2.0	.079	8500	6250	0.95
W5207	35	1.3780	72	2.8346	30.163	1-3/16	1.1875	2.0	.079	8500	6250	1.21
5208	40	1.5748	80	3.1496	30.163	1-3/16	1.1875	2.0	.079	9600	7250	1.26
5209	45	1.7717	85	3.3465	30.163	1-3/16	1.1875	2.0	.079	10800	8300	1.37
5210	50	1.9685	90	3.5433	30.163	1-3/16	1.1875	2.0	.079	11500	9400	1.48
5211	55	2.1654	100	3.9370	33.338	1-5/16	1.3125	2.5	.098	14200	11900	2.17
5212	60	2.3622	110	4.3307	36.513	1-7/16	1.4375	2.5	.098	16100	13100	2.80
5213	65	2.5591	120	4.7244	38.100	1-1/2	1.5000	2.5	.098	18700	16300	3.46
5214	70	2.7559	125	4.9213	39.688	1-9/16	1.5625	2.5	.098	20400	17900	3.97
5215	75	2.9528	130	5.1181	41.275	1-5/8	1.6250	2.5	.098	20300	18100	4.20
5216	80	3.1496	140	5.5118	44.450	1-3/4	1.7500	3.0	.118	23800	21400	5.50
5217	85	3.3465	150	5.9055	49.213	1-15/16	1.9375	3.0	.118	25100	23900	6.75
5218	90	3.5433	160	6.2992	52.388	2-1/16	2.0626	3.0	.118	31500	29000	8.90

NOTE: 5211 through 5218 are only available as open or NR types.